



iCar Low Noise Fan 30*30*10 MM
High Operating Temp. AECQ Series


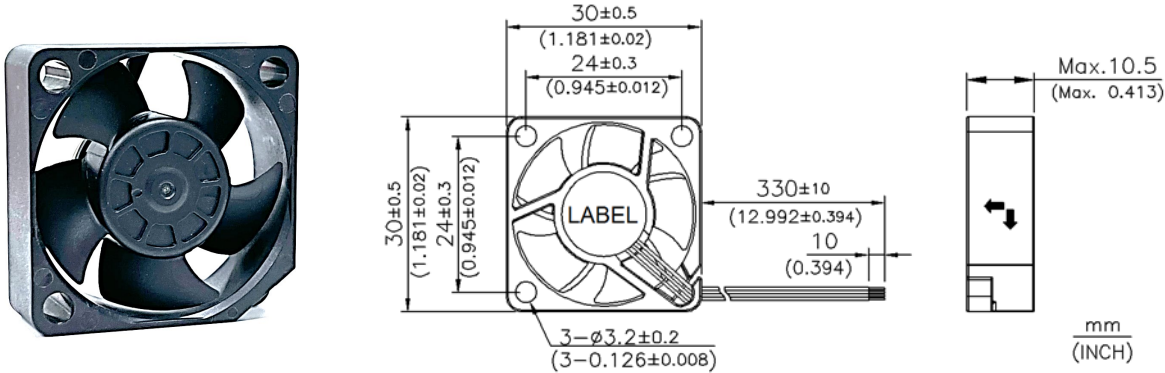


Housing : Plastic (UL 94V-0)
Impeller : Plastic (UL 94V-0)
Bearing Hydraulic Bearing
Operating temp : -20 ~ 90℃
Mass : 8g

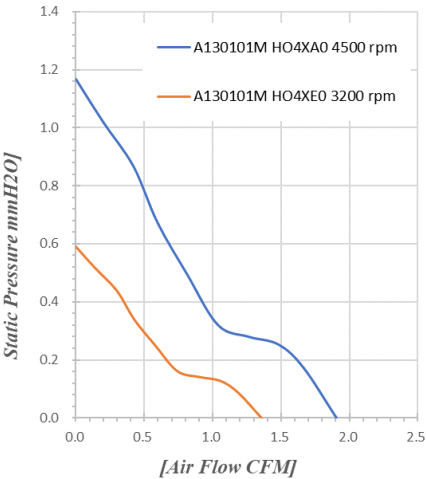


Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @50CM
					VDC	VDC	℃	R.P.M	Amp	Watt	CFM	m³/min	inH2O	mmH2O	
3010 12V 静音恆速 90℃系列	A130101M	HO4XA0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	4500	0.030	0.35	1.91	0.05	0.05	1.17	17.4
	A130101M	HO4XE0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	3200	0.015	0.18	1.36	0.04	0.02	0.59	10.0
3010 12V 静音恆速 90℃AECQ系列	A130101M	HO4TA0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	4500	0.030	0.35	1.91	0.05	0.05	1.17	17.4
	A130101M	HO4TE0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	3200	0.015	0.18	1.36	0.04	0.02	0.59	10.0

iCar Fan 30*30*10 MM
High Operating Temp. AECQ Series

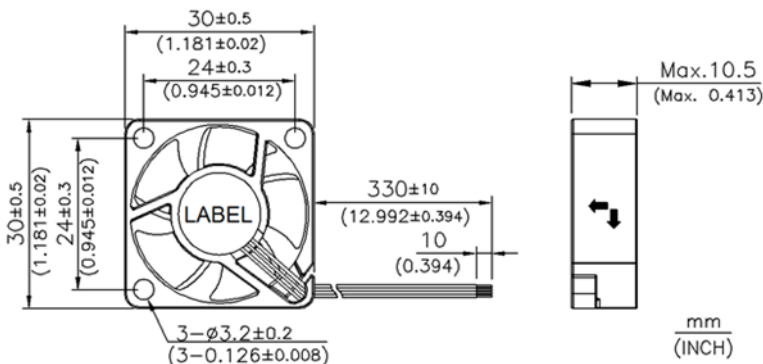


Housing : Plastic (UL 94V-0)
Impeller : Plastic (UL 94V-0)
Bearing Hydraulic Bearing
Operating temp : -40 ~ 90°C
Mass : 8g

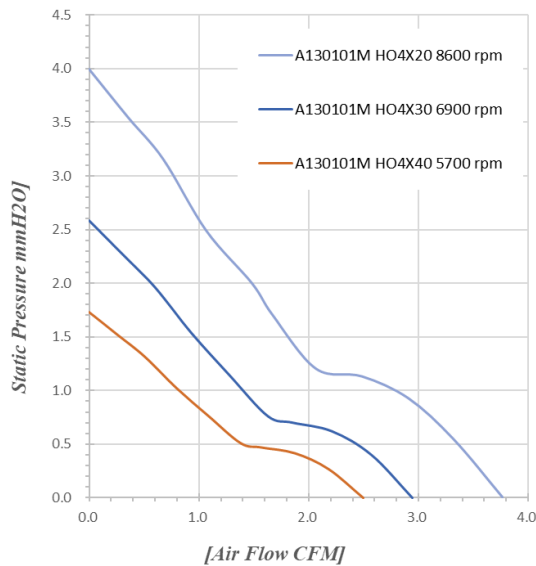


Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m³/min	inH2O	mmH2O	dB(A)
3010 12V 90°C 系列	A130101M	HO4X20	+/-/FG/PWM	Hydraulic	12	10~13.8	-40~90	8600	0.050	0.60	3.76	0.11	0.16	4.00	20.0
	A130101M	HO4X30	+/-/FG/PWM	Hydraulic	12	10~13.8	-40~90	6900	0.038	0.46	2.95	0.08	0.10	2.59	17.7
	A130101M	HO4X40	+/-/FG/PWM	Hydraulic	12	10~13.8	-40~90	5700	0.025	0.30	2.50	0.07	0.07	1.73	15.9
3010 12V 90°C-AECQ 系列	A130101M	HO4T20	+/-/FG/PWM	Hydraulic	12	8~16	-40~90	8600	0.050	0.60	3.76	0.11	0.16	4.00	20.0
	A130101M	HO4T30	+/-/FG/PWM	Hydraulic	12	8~16	-40~90	6900	0.038	0.46	2.95	0.08	0.10	2.59	17.7
	A130101M	HO4T40	+/-/FG/PWM	Hydraulic	12	8~16	-40~90	5700	0.025	0.30	2.50	0.07	0.07	1.73	15.9

iCar Fan Blower 30*30*10 MM
High Operating Temp. AECQ Series
Reference Spec. MP: 2023/May

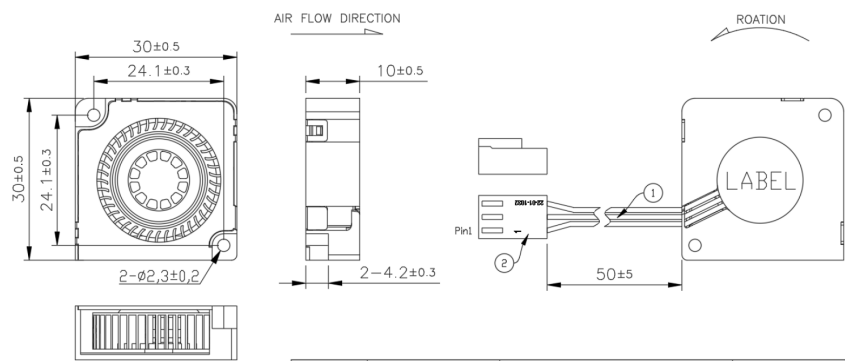

项次 No.	品名 Parts.	规格 SPEC	功能 Function
①	Lead wire UL 1061#28AWG	Pin 1: Red Wire (紅色導線)	+
		Pin 2: Black Wire (黑色導線)	-
		Pin 3: Blue Wire (藍色導線)	FG
②	Connector	Molex 022011032 or Equivalent	

Housing : Plastic (UL 94V-0)
Impeller : Plastic (UL 94V-0)
Bearing Hydraulic Bearing
Operating temp : -40 ~ 90℃
Mass : 8.1g

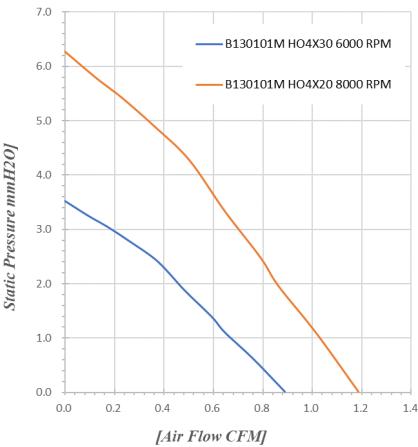



Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	℃	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	
Blower 3010 12V 90℃ 系列	B130101M	HO4X20	+/-FG/PWM	Hydraulic	12	10~13.8	-40~90	8000	0.051	0.61	1.19	0.03	0.25	6.27	29.8
	B130101M	HO4X30	+/-FG/PWM	Hydraulic	12	10~13.8	-40~90	6000	0.022	0.26	0.89	0.03	0.14	3.53	22.5
Blower 3010 12V 90℃ AECQ 系列	B130101M	HO4T20	+/-FG/PWM	Hydraulic	12	8~16	-40~90	8000	0.051	0.61	1.19	0.03	0.25	6.27	29.8
	B130101M	HO4T30	+/-FG/PWM	Hydraulic	12	8~16	-40~90	6000	0.022	0.26	0.89	0.03	0.14	3.53	22.5

iCar Low Noise Blower

30*30*10/40*40*10 MM

High Operating Temp. AECQ Series

Reference Spec. MP: 2023/May

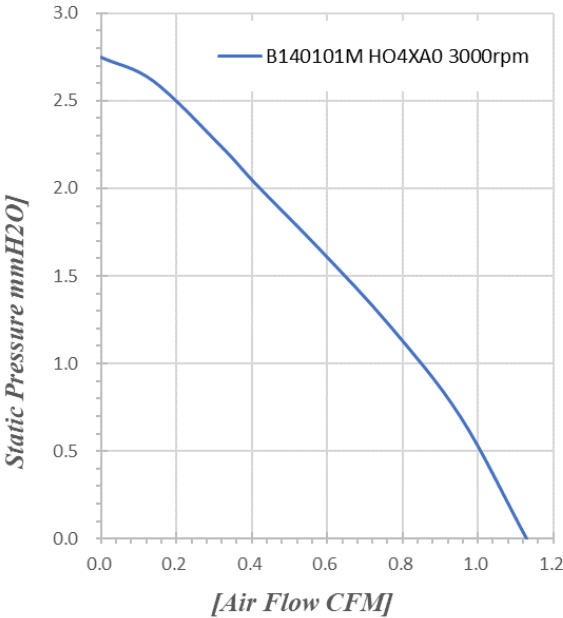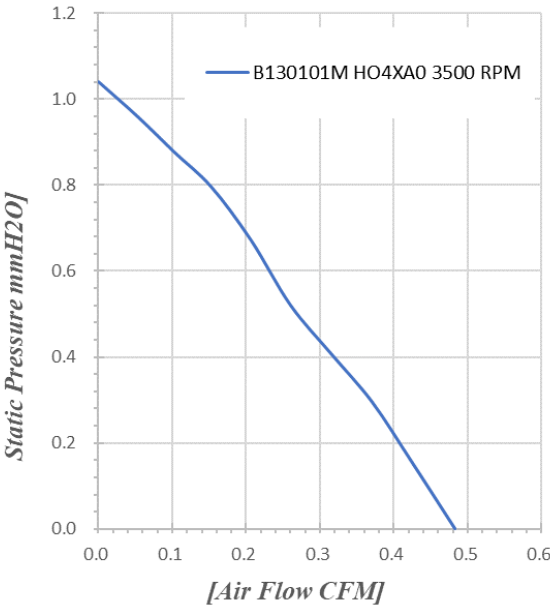

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise @100CM
					VDC	VDC	℃	R.P.M	Amp	Watt	CFM	m³/min	inH2O	mmH2O	dB(A)
Blower 3010 12V 静音恆速 90℃系列	B130101M	HO4XA0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	3500	0.010	0.12	0.48	0.014	0.046	1.04	16.1
Blower 3010 12V 静音恆速 90℃AECQ系列	B130101M	HO4TA0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	3500	0.010	0.12	0.48	0.01	0.05	1.04	16.1
Blower 4010 12V 静音恆速 90℃系列	B140101M	HO4XA0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	3000	0.022	0.27	1.13	0.03	0.06	2.75	16.2
Blower 4010 12V 静音恆速 90℃AECQ系列	B140101M	HO4TA0	+/-FG/PWM	Hydraulic	12	8~16	-20~90	3000	0.022	0.27	1.13	0.03	0.06	2.75	16.2