



iCar Fan 50*50*15 MM
High Operating Temp. Series

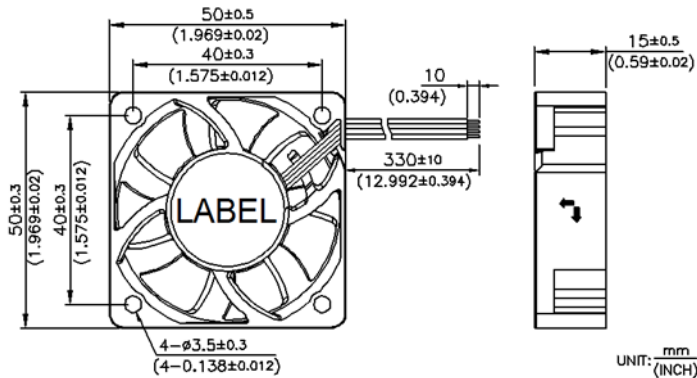


Housing : Plastic (UL 94V-0)
Impeller : Plastic (UL 94V-0)
Bearing Ball bearing
Operating temp : -40 ~ 95°C / 105°C
Mass : 34g

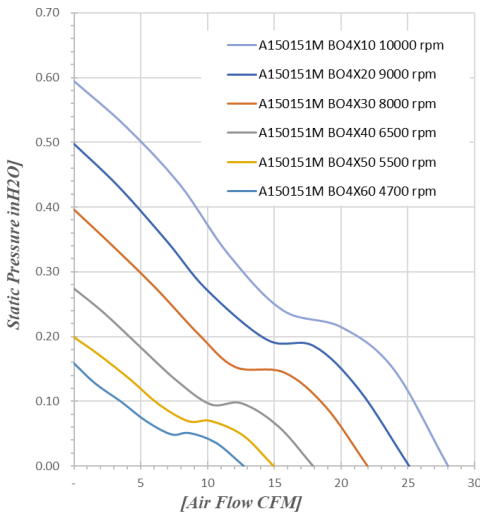


Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC									
5015 12V 95°C 系列	A150151M	BO4X10	+/-FG/PWM	Ball	12	6~13.8	-40~95	10000	0.29	3.43	28.0	0.79	0.59	15.1	47.5
	A150151M	BO4X20	+/-FG/PWM	Ball	12	6~13.8	-40~95	9000	0.208	2.50	25.1	0.71	0.50	12.6	45.2
	A150151M	BO4X30	+/-FG/PWM	Ball	12	6~13.8	-40~95	8000	0.146	1.75	22.0	0.62	0.40	10.1	40.6
	A150151M	BO4X40	+/-FG/PWM	Ball	12	6~13.8	-40~95	6500	0.101	1.21	18.2	0.52	0.27	7.0	34.7
	A150151M	BO4X50	+/-FG/PWM	Ball	12	6~13.8	-40~95	5500	0.067	0.81	15.0	0.42	0.20	5.1	30.3
	A150151M	BO4X60	+/-FG/PWM	Ball	12	6~13.8	-40~95	4700	0.048	0.58	12.7	0.36	0.16	4.0	26.9
5015 12V 105°C 系列	A150151M	BO4Y10	+/-FG/PWM	Ball	12	6~13.8	-40~105	10000	0.285	3.43	28.0	0.79	0.59	15.1	47.5
	A150151M	BO4Y20	+/-FG/PWM	Ball	12	6~13.8	-40~105	9000	0.208	2.50	25.1	0.71	0.50	12.6	45.2
	A150151M	BO4Y30	+/-FG/PWM	Ball	12	6~13.8	-40~105	8000	0.146	1.75	22.0	0.62	0.40	10.1	40.6
	A150151M	BO4Y40	+/-FG/PWM	Ball	12	6~13.8	-40~105	6500	0.101	1.21	18.2	0.52	0.27	7.0	34.7
	A150151M	BO4Y50	+/-FG/PWM	Ball	12	6~13.8	-40~105	5500	0.067	0.81	15.0	0.42	0.20	5.1	30.3
	A150151M	BO4Y60	+/-FG/PWM	Ball	12	6~13.8	-40~105	4700	0.048	0.58	12.7	0.36	0.16	4.0	26.9

iCar Fan 50*50*15 MM
AECQ Series

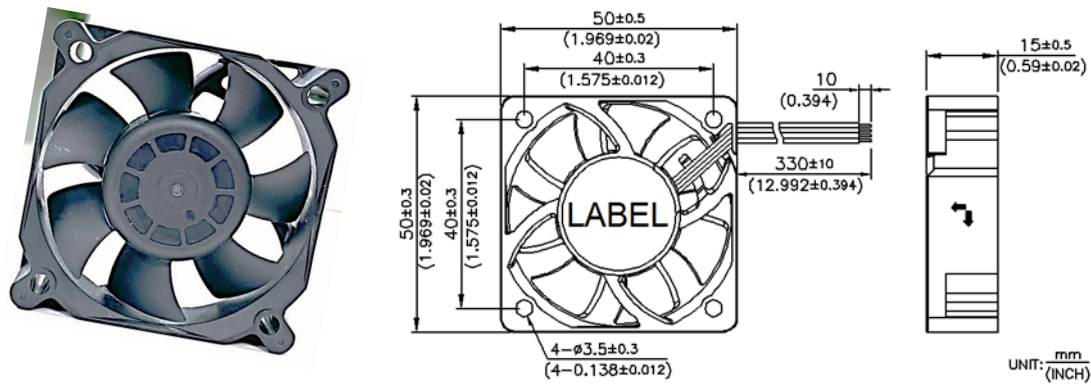

Housing : Plastic (UL 94V-0)
Impeller : Plastic (UL 94V-0)
Bearing : Ball bearing
Operating temp : -40 ~ 95°C / 105°C
Mass : 34g

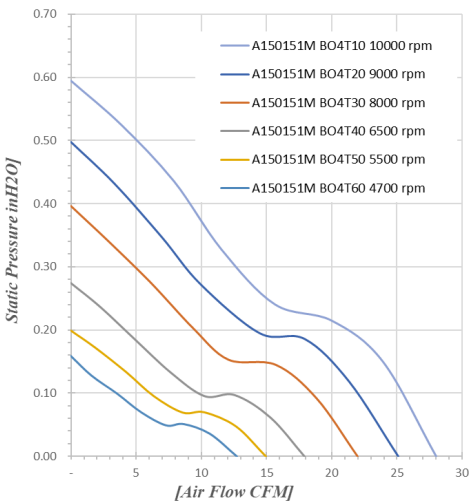

Product Type	Model No.		Control Type	Bearing	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC					CFM	m ³ /min	inH2O	mmH2O	
5015 12V 95°C-AECQ系列	A150151M	BO4T10	+/-FG/PWM	Ball	12	8~16	-40~95	10000	0.29	3.43	28.0	0.79	0.59	15.1	47.5
	A150151M	BO4T20	+/-FG/PWM	Ball	12	8~16	-40~95	9000	0.21	2.50	25.1	0.71	0.50	12.6	45.2
	A150151M	BO4T30	+/-FG/PWM	Ball	12	8~16	-40~95	8000	0.15	1.75	22.0	0.62	0.40	10.1	40.6
	A150151M	BO4T40	+/-FG/PWM	Ball	12	8~16	-40~95	6500	0.10	1.21	18.2	0.52	0.27	7.0	34.7
	A150151M	BO4T50	+/-FG/PWM	Ball	12	8~16	-40~95	5500	0.067	0.81	15.0	0.42	0.20	5.1	30.3
	A150151M	BO4T60	+/-FG/PWM	Ball	12	8~16	-40~95	4700	0.048	0.58	12.7	0.36	0.16	4.0	26.9
5015 12V 105°C AECQ系列	A150151M	BO4U10	+/-FG/PWM	Ball	12	8~16	-40~105	10000	0.285	3.43	28.0	0.79	0.59	15.1	47.5
	A150151M	BO4U20	+/-FG/PWM	Ball	12	8~16	-40~105	9000	0.208	2.50	25.1	0.71	0.50	12.6	45.2
	A150151M	BO4U30	+/-FG/PWM	Ball	12	8~16	-40~105	8000	0.146	1.75	22.0	0.62	0.40	10.1	40.6
	A150151M	BO4U40	+/-FG/PWM	Ball	12	8~16	-40~105	6500	0.101	1.21	18.2	0.52	0.27	7.0	34.7
	A150151M	BO4U50	+/-FG/PWM	Ball	12	8~16	-40~105	5500	0.067	0.81	15.0	0.42	0.20	5.1	30.3
	A150151M	BO4U60	+/-FG/PWM	Ball	12	8~16	-40~105	4700	0.048	0.58	12.7	0.36	0.16	4.0	26.9