



iCOOL Fan 30*30*10 MM Series

DIMENSION DRAWING

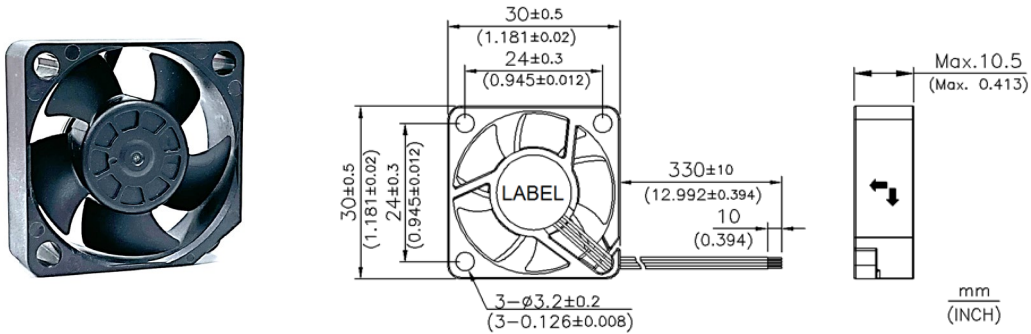


Housing : Plastic (UL 94V-0)
Impeller : Plastic (UL 94V-0)
Bearing : Hydraulic Bearing
Operating temp : -10 ~ 70°C
Mass : 8g

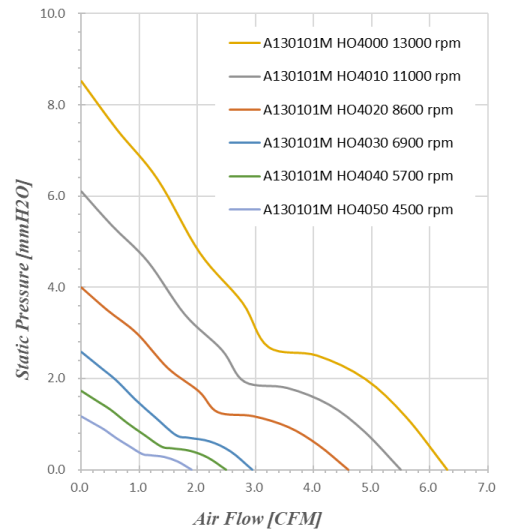


Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C	R.P.M	Amp	Watt	CFM	m ³ /min	inH2O	mmH2O	dB(A)
3010 5V Hydraulic Series	A130100M	HO4000	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	13000	0.240	1.20	6.30	0.18	0.34	8.52	29.0
	A130100M	HO4010	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	11000	0.144	0.72	5.50	0.16	0.24	6.10	23.0
	A130100M	HO4020	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	8600	0.120	0.60	4.65	0.13	0.16	4.00	20.0
	A130100M	HO4030	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	6900	0.091	0.46	2.95	0.08	0.10	2.59	18.2
	A130100M	HO4040	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	5700	0.077	0.38	2.50	0.07	0.07	1.73	16.8
	A130100M	HO4050	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	4500	0.065	0.32	1.91	0.05	0.05	1.17	16.3
3010 12V Hydraulic Series	A130101M	HO4000	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	13000	0.100	1.20	6.30	0.18	0.34	8.52	29.0
	A130101M	HO4010	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	11000	0.060	0.72	5.50	0.16	0.24	6.10	23.0
	A130101M	HO4020	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	8600	0.050	0.60	4.65	0.13	0.16	4.00	20.0
	A130101M	HO4030	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	6900	0.038	0.46	2.95	0.08	0.10	2.59	18.2
	A130101M	HO4040	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	5700	0.032	0.38	2.50	0.07	0.07	1.73	16.8
	A130101M	HO4050	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	4500	0.027	0.32	1.91	0.05	0.05	1.17	16.3

iCOOL Fan Blower 30*30*10 MM Series

DIMENSION DRAWING

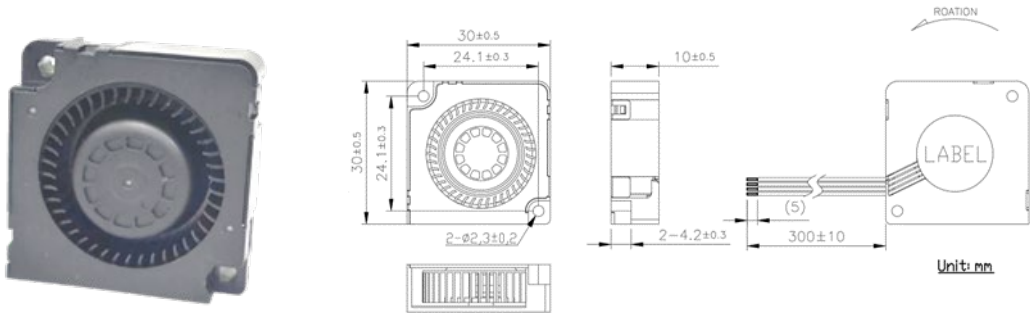

Housing : Plastic (UL 94V-0)
 Impeller : Plastic (UL 94V-0)
 Bearing : Hydraulic Bearing
 Operating temp : -10 ~ 70°C
 Mass : 8.1g

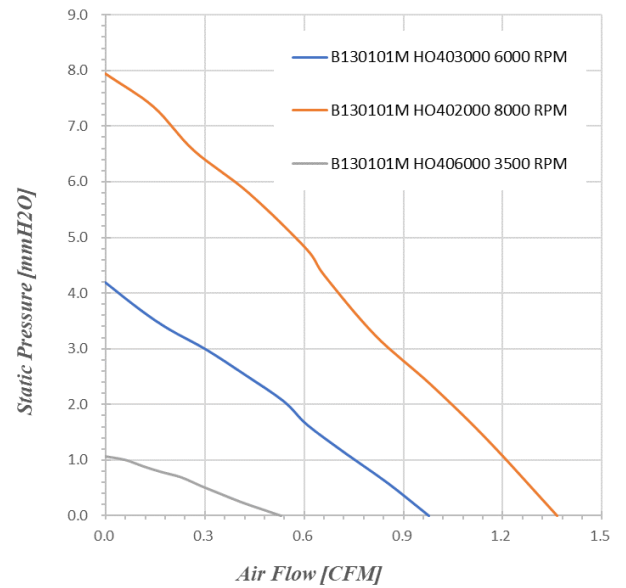

Product Type	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Operating Temp.	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	°C				R.P.M	Amp	Watt	CFM	
Blower 3010 5V Series	B130100M	HO402000	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	8000	0.160	0.80	1.36	0.039	0.313	7.95	29.8
	B130100M	HO403000	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	6000	0.086	0.43	0.98	0.028	0.165	4.20	22.5
	B130100M	HO406000	+/-FG/PWM	Hydraulic	5	3.5~5.5	-10~70	3500	0.032	0.16	0.53	0.015	0.046	1.06	25.0
Blower 3010 12V Series	B130101M	HO402000	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	8000	0.067	0.80	1.36	0.039	0.313	7.95	29.8
	B130101M	HO403000	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	6000	0.036	0.43	0.98	0.028	0.165	4.20	22.5
	B130101M	HO406000	+/-FG/PWM	Hydraulic	12	7~13.8	-10~70	3500	0.013	0.16	0.53	0.015	0.046	1.06	25.0