


# LONGWIN


蘇州隆盈智能科技有限公司

## iWater & iSALT Fan 60\*60\*38 MM IP68 Rating Dustproof & Waterproof & SALT FOG Proof Fan Series

### DIMENSION DRAWING

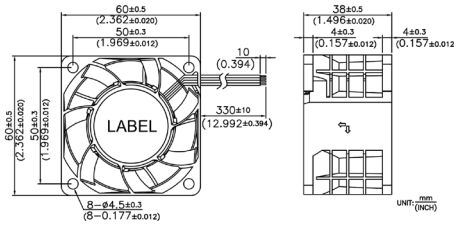

- Housing : Plastic (UL 94V-0)
- Impeller : Plastic (UL 94V-0)
- Bearing : Ball bearing
- Lead Wires : UL10368 AWG22 OR Equivalent
- Mass : 148g

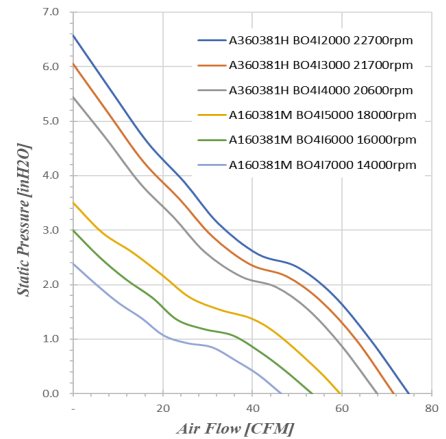

產品別	Model No.		Control Type	Bearing Type	Rated Voltage	Operating Voltage Range	Speed	Input Current	Input Power	Maximum Air Flow		Maximum Air Pressure		Noise
					VDC	VDC	R.P.M	Amp	Watt	CFM	m <sup>3</sup> /min	inH2O	mmH2O	
6038 12V IP68 Series	A360381H	BO4I2000	+/-FG/PWM	Ball	12	10~13.8	22700	3.16	37.9	73.5	2.08	7.0	177.2	70.6
	A360381H	BO4I3000	+/-FG/PWM	Ball	12	10~13.8	21700	2.73	32.7	70.1	1.98	6.3	161.3	68.8
	A360381H	BO4I4000	+/-FG/PWM	Ball	12	10~13.8	20600	2.64	31.7	66.2	1.87	5.9	149.4	67.7
	A160381M	BO4I5000	+/-FG/PWM	Ball	12	6~13.8	18000	1.61	19.3	60.0	1.70	3.9	98.6	65.1
	A160381M	BO4I6000	+/-FG/PWM	Ball	12	6~13.8	16000	1.26	15.1	53.4	1.51	2.9	73.6	62.4
	A160381M	BO4I7000	+/-FG/PWM	Ball	12	6~13.8	14000	0.78	9.4	46.2	1.31	2.6	65.8	59.1
6038 12V iSALT Series	A360381H	BO4F2000	+/-FG/PWM	Ball	12	10~13.8	22700	3.16	37.9	73.5	2.08	7.0	177.2	70.6
	A360381H	BO4F3000	+/-FG/PWM	Ball	12	10~13.8	21700	2.73	32.7	70.1	1.98	6.3	161.3	68.8
	A360381H	BO4F4000	+/-FG/PWM	Ball	12	10~13.8	20600	2.64	31.7	66.2	1.87	5.9	149.4	67.7
	A160381M	BO4F5000	+/-FG/PWM	Ball	12	6~13.8	18000	1.61	19.3	60.0	1.70	3.9	98.6	65.1
	A160381M	BO4F6000	+/-FG/PWM	Ball	12	6~13.8	16000	1.26	15.1	53.4	1.51	2.9	73.6	62.4
	A160381M	BO4F7000	+/-FG/PWM	Ball	12	6~13.8	14000	0.78	9.4	46.2	1.31	2.6	65.8	59.1
6038 24V IP68 Series	A160382H	BO4I2000	+/-FG/PWM	Ball	24	14~27.6	22700	1.58	37.9	73.5	2.08	7.0	177.2	70.6
	A160382H	BO4O3000	+/-FG/PWM	Ball	24	14~27.6	21700	1.36	32.7	70.1	1.98	6.3	161.3	68.8
	A160382H	BO4I4000	+/-FG/PWM	Ball	24	14~27.6	20600	1.32	31.7	66.2	1.87	5.9	149.4	67.7
	A160382H	BO4I5000	+/-FG/PWM	Ball	24	14~27.6	18000	0.81	19.3	60.0	1.70	3.9	98.6	65.1
	A160382H	BO4I6000	+/-FG/PWM	Ball	24	14~27.6	16000	0.63	15.1	53.4	1.51	2.9	73.6	62.4
	A160382H	BO4I7000	+/-FG/PWM	Ball	24	14~27.6	14000	0.39	9.4	46.2	1.31	2.6	65.8	59.1
6038 24V iSALT Series	A160382H	BO4F2000	+/-FG/PWM	Ball	24	14~27.6	22700	1.58	37.9	73.5	2.08	7.0	177.2	70.6
	A160382H	BO4F3000	+/-FG/PWM	Ball	24	14~27.6	21700	1.36	32.7	70.1	1.98	6.3	161.3	68.8
	A160382H	BO4F4000	+/-FG/PWM	Ball	24	14~27.6	20600	1.32	31.7	66.2	1.87	5.9	149.4	67.7
	A160382H	BO4F5000	+/-FG/PWM	Ball	24	14~27.6	18000	0.81	19.3	60.0	1.70	3.9	98.6	65.1
	A160382H	BO4F6000	+/-FG/PWM	Ball	24	14~27.6	16000	0.63	15.1	53.4	1.51	2.9	73.6	62.4
	A160382H	BO4F7000	+/-FG/PWM	Ball	24	14~27.6	14000	0.39	9.4	46.2	1.31	2.6	65.8	59.1